



SHINE A LIGHT ON A  
CLEAN, HEALTHY SPA



  
**DEL:UV-C SPA 2**  
TARGETED GERMICIDAL UV-C SPA SANITIZER



# RAY'S OF ULTRAVIOLET LIGHT RID YOUR HOT TUB OF CONTAMINANTS SO FEWER CHEMICALS ARE NEEDED

Keep your hot tub extra clean with ultraviolet light. DEL UV<sup>®</sup>-C Spa 2 harnesses the power of UV to deep clean water as it passes through the filtration system—eliminating 99.7%\* of certain potentially harmful contaminants, reducing the need for additional chemicals.

## QUICK & EASY INSTALLATION

A true all-in-one design with simple two-port plumbing makes installation of DEL UV-C Spa 2 quick and easy.



## ADDITIONAL FEATURES

- DEL UV-C Spa 2 works with either 240V or 120V power for global use
- UL Certified for global compliance
- Fits any portable hot tub or swim spa up to 2500 gallons
- Trust DEL for durable, well-built products with an extremely long life

\*Based on third party testing in accordance with relevant ISO standards for microorganisms tested: Escherichia coli, Enterococcus spp., Pseudomonas aeruginosa, Staphylococcus aureus.

\*\*Based on third party comparison testing of DEL UV<sup>®</sup>-C Spa 2 vs. Balboa Wavetec™ in accordance with relevant ISO standards for microorganisms tested: Escherichia coli, Enterococcus spp., Pseudomonas aeruginosa, Staphylococcus aureus.

A Fluidra Brand | C-M-P.com | 1.800.733.9060

©2026 Fluidra. All rights reserved. The trademarks and trade names used herein are the property of their respective owners. 00026\_SL




## CLEAN TECHNOLOGY

The active ingredient in UV-C is rays of ultraviolet light. The DEL UV-C Spa 2 unit doesn't add any chemicals, gases or oxidants to hot tub water.

## OUTPERFORMS THE COMPETITION

DEL UV-C Spa 2 outperforms the competition—leaving up to 7x fewer contaminants in the water after a single pass through the system.\*\*

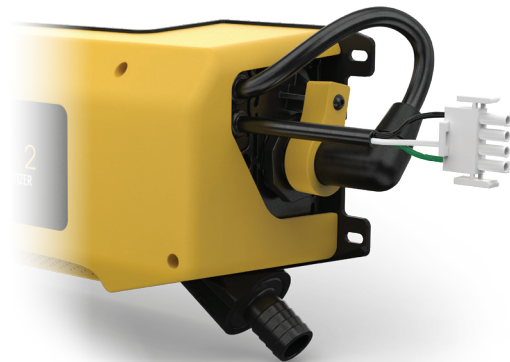

## SPECIFICATIONS

Global Power Ratings	120 - 240V   50/60Hz   271 - 207mA   25W
UV Lamp Life	16,000 hours
Enclosure	IPX5
Operating Water Temp	41 - 104°F   5 - 40°C Max
Operating Pressure	30 PSI Max
Flow Rate	4 - 12 GPM

## Part Numbers

55934-002-909 for Ribbed Barb  
55944-002-909 for Smooth Barb

